



AMS 545D INDUSTRIAL TABBING MACHINE



Improves the efficiency and presentation of your mailing processes

PRODUCT DESCRIPTION

If you produce large volumes of mail and are looking for an industrial alternative to using traditional envelopes in direct mail campaigns the use of small adhesive tabs on folded mailings is the answer. Tabs can be placed on a wide variety of open-ended media including mail pieces, folded stock, double postcards, newsletters and booklets. Not only do tabs ensure closure, they are a non-intrusive option and let you take advantage of Royal Mail postal discounts due to the mailings being lightweight. The tabber is perfect for mailing houses, commercial and industrial users.

Designed and engineered to meet the Royal Mail specifications for self-mailers and booklets that require multiple tabs per piece, the AMS 545D utilises a unique dual web applicator and innovative, patented, trailing edge tab mechanism.

- Servo driven web and trailing edge kicker
- Handles large 18" diameter rolls
- Also applies labels and stamps
- Operates inline with standard addressing systems



Key Features:

- Servo driven controls
- Side register belts for tight tabs
- Touch screen operator interface
- Side to side tabletop adjustment
- Quick-release upper belt system
- Quick-release peel plates
- Stop-in/Stop-out electrical interface
- KR conveyor pass through controls

Specifications:

Physical	English	Metric
Length	72"	182.9 cm
Width	38"	96.5 cm
Height	77"	195.6 cm
Shipping Weight	1395 lbs.	632.76 kg

Electrical Requirements

Voltage	Amp	Phase	Hz
220 VAC	50	1	50/60

Compressed Air Requirements

80 psi	at 5.0 acfm
--------	-------------

Features:

- Servo driven controls
- Side register belts for tight tabs
- Touch screen operator interface
- Side to side tabletop adjustment
- Quick-release upper belt system
- Quick-release peel plates
- Stop-in/Stop-out electrical interface
- KR conveyor pass through controls

Products

Tabs/Labels	Min. 1" dia. (2.54 cm)	Max 1.5" dia. (3.81 cm)
Tab Quantity	1 to 6 Tabs or STamps	
Tab Accuracy	+/- .0625" (1.6 mm)	
Labels	3" (7.62 cm) Width x 2" (5.1 cm) Length	
Materials	Minimum: 3.50" W (8.9 cm) 3.50" L (8.9 cm) .008" T (0.2 mm)	Maximum: 11" W (27.9 cm) 11" L (27.9 cm) .25" T (6.3 mm)


Operating Speeds

Maximum	350 fpm (138 mpm)
---------	-------------------

NOTE: Speeds are dependent on material being fed.

Options:

- Hydraulic lift kit for up to 5"
- Vacuum web waste removal kit
- Bump turn for infeed table section

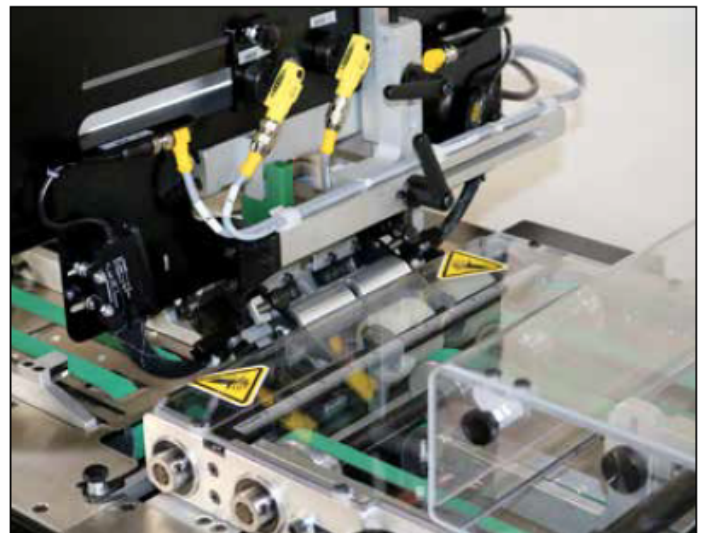

****Specifications subject to change without notice.**



Why Choose An AMS Tabbng Machine?

AMS is one of the UK's leading suppliers of mailroom equipment. As well as having a dedicated team of knowledgeable experts to offer advice and bespoke solutions to suit your mailing needs, we have a well-trained customer support team and highly skilled team of field engineers to support you after your purchase.

**AMS Ltd, Unit 21 Mead Park Industrial Estate,
River Way, Harlow, Essex, CM20 2SE**

Email: sales@amsmailingsystems.co.uk

Web: www.amsmailingsystems.co.uk Tel: 01992 460 111