

AMS WRAPMATIC 240 POLYWRAPPING SYSTEM



Improves the efficiency and presentation of your mailing processes

What Does It Do?

The fully automatic WrapMatic 240 is a completely innovative automatic wrapping machine. The L-sealing system provides an all round centre seal. Fitted with a standard kissing belt and adjustable centre sealing device, the machine can pack single or multiple items and is also available in a full stainless steel version. Up to 3,600 pieces can be wrapped per hour dependent on film and product size. The simple to use system also includes front and rear opening for easy access and servicing.

Products up to 240mm in height, 600mm in length and 400mm width can be wrapped. A great advantage of this system is that it doesn't require pneumatic connection and works only with electrical power supply. The benefit of this includes reduced maintenance requirements and noise levels as well as improved speed, productivity and sealing precision.

How Does It Work?

The WrapMatic 240 uses just one low cost roll of clear or printed poly film up to a maximum thickness of 80 microns. The system folds the poly film to form a sealed pack. When the process is complete the pack is ejected automatically or can be used with a shrink tunnel.

Key Features:

Belt speed adjustable by inverter

Complete automatic check at the start-up

2 product-reading photocells

10 language touch screen display

Integrated and movable film roll support

In-feed and out-feed electronic port to interface additional in-feed and out-feed belts

Machine on wheels and adjustable feet

Full waste film winder alarm device

Micro-puncher kit with adjustable tensioning film

SPECIFICATIONS

Speed	Up to 3600 items per hour-Speeds are dependant upon applications and operators
Material Size	Max W 400mm x L 600mm H 240mm
Sealing Bar Dimensions	640mm x 500mm
Max Film Roll	300mm x 700mm wide
Wrapping Film Types	PE, HDPE, Polyolefin, Polyethylene and many other types of poly film including bio-degradable
Wrapping Film Thickness	Up to 80 microns - Minimum Thickness By Test

TECHNICAL INFORMATION


Machine Dimensions (with closed hood)	(L)2485mm x (D)1240mm x (H)1715mm
Machine Dimensions (with open hood)	(L)2485mm x (D)1240mm x (H)1900mm
Machine Weight	763/813Kgs
Power	Single Phase 230VAC
Safety	Cover with interlocking switch




AMS have a range of shrink tunnels that work with the WrapMatic 240



Centre Sealing

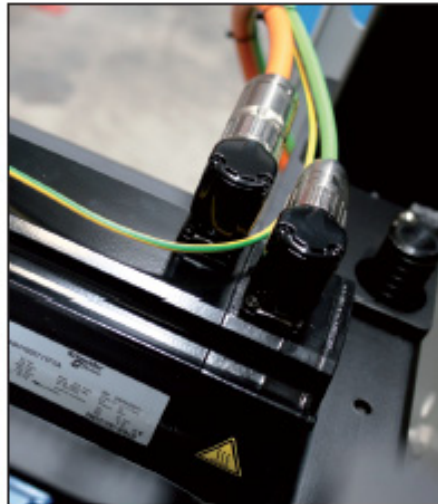

No pneumatic connection needed

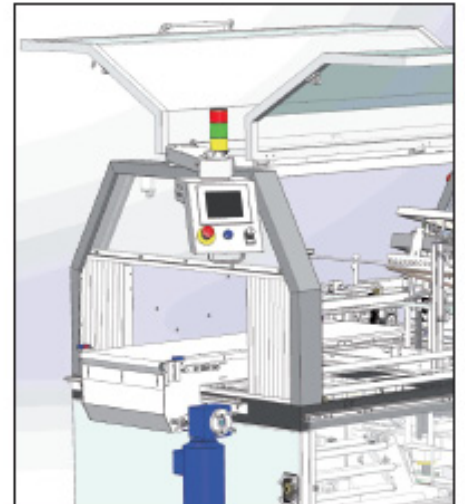

Open on both sides

Why Choose An AMS Polywrapping System?

AMS is one of the UK's leading suppliers of mailroom equipment. As well as having a dedicated team of knowledgeable experts to offer advice and bespoke solutions to suit your mailing needs, we have a well-trained customer support team and highly skilled team of field engineers to support you after your purchase.

This reliable and efficient after-care support service is provided to ensure you get the most out of your purchase. We also offer a comprehensive range of technical support and service packages that cover both equipment and software.

